

PULLERS & PULLER SETS

GEAR PULLERS

Forged from alloy, heat-treated steel, with fine-threaded center screws for extra pulling power. Jaws are adjustable and/or reversible to broaden applications.

2-JAW ADJUSTABLE/REVERSIBLE

No.	Spread	Reach	Screw Length	Capacity
8000	4"	3-1/2"	5"	2 Tons
8010	7"	5-1/2"	7"	5 Tons

2-JAW REVERSIBLE

No.	Spread	Reach	Screw Length	Capacity
8005	6"	3-1/2"	7"	5 Tons
8015	9"	5-1/2"	9"	7 Tons

2-JAW ADJUSTABLE

No.	Spread	Reach	Screw Length	Capacity
8020	10"	9"	9"	7 Tons
8025	12"	11"	13"	13 Tons
8030	15"	5"	13"	13 Tons

3-JAW ADJUSTABLE/REVERSIBLE

No.	Spread	Reach	Screw Length	Capacity
8035	4"	3-1/2"	5"	2 Tons
8045	8"	5-1/2"	7"	5 Tons

3-JAW REVERSIBLE

No.	Spread	Reach	Screw Length	Capacity
8040	7"	3-1/2"	7"	5 Tons
8050	10"	5-1/2"	9"	7 Tons

3-JAW ADJUSTABLE

No.	Spread	Reach	Screw Length	Capacity
8055	11"	9"	9"	7 Tons
8057	14"	11"	13"	13 Tons
8059	17"	15"	13"	13 Tons

HEAVY-DUTY QUICK-CHANGE GEAR PULLERS

Adjusting knob controls spring for quick jaw removal to convert puller from external to internal or 2-jaw to 3-jaw.

No.	Range	Reach	Capacity
8066	3" - 4"	3-1/2"	4 Tons
8068	3" - 7"	5-1/2"	7 Tons

COMBINATION GEAR PULLER KITS

Convert from 2-jaw to 3-jaw puller. Includes two yokes, center screw and 3 legs.

No.	Spread	Reach	Capacity
A830	3"	3-1/2"	1 Ton
A840	4"	4-1/2"	1 Ton




8055-8057-8059



BEARING SEPARATORS

Remove generator gears, bearings, bearing cones and similar parts where ordinary puller jaws will not reach. Knife-like edges minimize damage to parts.

No.	Range
8060	Up to 2-1/4" / 57mm
8065	Up to 4-1/4" / 108mm
8150	Up to 6" / 15cm
8155	Up to 8" / 20cm



8097 LARGE GEAR & PULLEY PULLER

Remove parts with tapped holes with 8-1/4" / 21cm yoke and 11-5/8" / 30cm long forcing screw. Puller spreads from 2" to 7-3/4" / 5 to 20cm.



8095 TIMING GEAR PULLER

Pull parts with two tapped holes, including gears, fan pulleys, balancers and cam gears. Cross-arm is 1" square and 5" long, with 3/8" - 16 side bolts.




1550 FLANGE-TYPE PULLER SET

Two yoke sizes and 4 sets of side screws for all types of pulling jobs. Use for Gears, Harmonic Balancers, Pulleys, Steering Wheels and more. Also includes 2 center screws and 2 swivel tips.




A490 8-WAY SLIDE HAMMER SET

Service rear axles, bearings, oil seals and press-fit parts. Includes reversible jaws for internal/external work, 3 jaws, 5 lb. slide hammer, rear axle pulling plate, screw, hook, dent puller adapter, cone and other adapters.

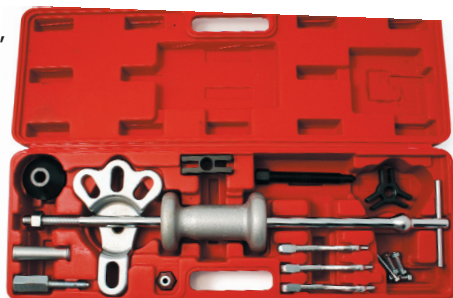

8090 SLIDE HAMMER PULLER SET

Remove bearings, gears, bushings, seals, grease retainers, etc. Includes 4 jaw assemblies for internal/external and 2/3 jaw pulling. 3 jaw range: 1-1/2 to 4-1/2" / 38 to 114mm outside, 1-5/16 to 4-3/4" / 33 to 121mm inside. 2 jaw range: 1 to 4-1/2" / 25 to 114mm outside, 1-1/4 to 3-3/8" / 32 to 86mm inside.

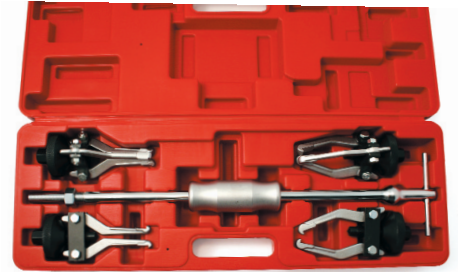


8070 PILOT BEARING PULLER - SCREW TYPE

Removes fly wheel pilot bearings and bushings up to 7-1/2" / 19cm long.

Replacement Jaws

- 8070x06** Standard Jaw
Range: 1/2 to 1-1/2" / 13 to 38mm I.D.
- 8070x07** Small Jaw
Range: 3/8 to 1-3/8" / 9.5mm to 35mm

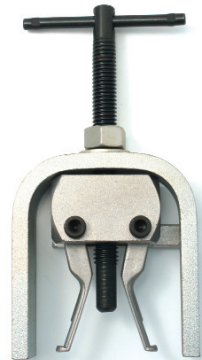

8075 PILOT BEARING PULLER - SLIDE HAMMER

For inside pulling jobs, jaws will remove flywheel pilot and other bearings. Range: 1/2" - 1-1/2" (13mm - 38mm)



8077 PILOT BEARING PULLER - SLIDE HAMMER

Similar to #8075 but extra long 20-1/2" for added reach.

