
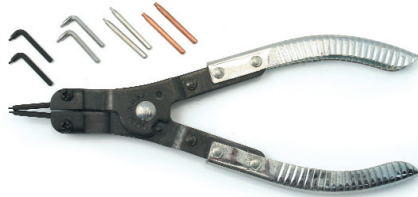


HEAVY-DUTY SNAP-RING PLIERS

Includes 4 pairs of interchangeable tips: .039" / .99mm and .074" / 1.88mm Straight, .047" / 1.20mm Bent 45° and .047" / 1.20mm Bent 90°. OAL: 7" / 18cm


No.	Style
8845	Internal
8846	External



SNAP-RING PLIERS

Includes 4 pairs of interchangeable tips: .039" / .99mm and .074" / 1.88mm Straight, .047" / 1.20mm Bent 45° and .047" / 1.20mm Bent 90°. OAL: 6" / 16cm

No.	Style
A845	Internal
A846	External
A844	2 Pc. Set



A842 INTERNAL/EXTERNAL SNAP-RING PLIERS SET

Includes pliers and 4 tip assemblies: 45°, 90° and 2 straight. Range: 3/8 - 2" / 10 - 50mm



8850 CONVERTIBLE SNAP-RING PLIERS

Quick Switch™ device converts pliers from internal to external. Includes interchangeable tips: Straight (.036" / 90mm, .047" / 1.20mm, .070" / 1.80mm) and 90° (.036" / 90mm, .047" / 1.20mm). Range: Internal - 3/8 to 2" / 10 to 48mm; External - 1/4 to 2" / 7 to 48mm. OAL: 7-1/2" / 19cm




8860 10 PC. FIXED-POINT SNAP-RING PLIERS SET

Service internal and external rings with 8 sizes of convertible pliers. Straight Tip: .038, .047, .070 & .090". 72° Tip: .038, .047, .070 & .090". Also includes 2 picks.



8870 2 PC. HEAVY-DUTY SNAP-RING PLIERS SET

Extra-large 16" / 40cm Internal and External Pliers. Includes 6 pairs of tips. Range: Internal- 3-1/16 to 6-1/4" / 78 to 159mm; External - 3-1/2 to 6-1/2" / 89 to 165mm.



8840 LOCK RING PLIERS

Spread snap rings found on transmissions, brakes, clutch shafts, etc. Spring loaded with single piece forged jaws. OAL: 9" / 23cm



A848 HEAVY-DUTY LOCK RING PLIERS

For external lock rings used in truck and tractor transmissions. Spring-loaded handles and 2 sets of tips. Range: 3" / 75mm. OAL: 13" / 33cm

