

MICROMETER CLICKER-TYPE TORQUE WRENCHES

Micro-adjustable, with bi-directional ratchet head and sliding collar for setting torque. Tube is chrome-plated. All wrenches are serviceable.

No.	Drive	Range	OAL
8950	3/8"	10 - 100 Ft. Lb 16.9 – 138.9 Nm	11-1/2" / 44cm
8952	3/8"	25 - 250 In. Lb 3.61 – 29.03 Nm	13" / 33cm
8955	1/2"	25 - 250 Ft. Lb 43.4 – 348.4 Nm	23" / 58cm



8970 3/4" DRIVE 600 FT. LB. TORQUE WRENCH

Features easy-to-read scale, knurled handle and heavy-duty construction.
Range: 100 to 600 Ft. Lb. / 135 – 815 Nm.
OAL: 43" / 109cm.



MICROMETER TORQUE WRENCHES

Reversible ratchet type with chrome-plated tube, knurled handle and knurled locking nut for holding torque setting.

No.	Drive	Range	OAL
8900	3/8"	5 - 80 Ft. Lb.	14" / 36cm
8905	1/2"	10 - 150 Ft. Lb.	18" / 46cm
8910	1/2"	25 - 250 Ft. Lb.	25" / 64cm




A899 BEAM-TYPE TORQUE WRENCH

Fast to use and low cost, this wrench measures from 0 - 140 foot pounds (0 - 20 Meter Kilograms). 1/2" square drive. OAL 19" (48cm)



8975 TORQUE ANGLE METER

Use for accurate tightening of head and manifold bolts whenever a torque angle is required by the manufacturer's specification. Also called "torque to yield". Battery-type clip frees up hand. Use with 1/2" drive tools.

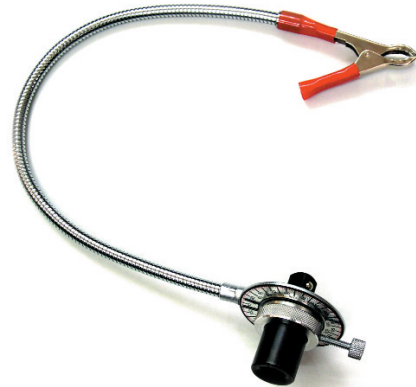

8980 TORQUE ANGLE METER

Same function as #8975, but without flex clip.

